



PTO SHAFT DRIVEN 60 - 200 CFM UNDERDECK AIR COMPRESSOR



Shown: 125 - 185 cfm kit



Shown: 60 - 85 cfm tank & cooling system

Lightweight, Space Saving, Cost Effective...Vanair PTO Underdeck Air Compressor

When you need "Air Power to Go", rely on Vanair's line of powerful, compact truck-mounted underdeck air compressors. A fraction of the cost of tow-behinds, these compressors deliver a powerful 60 - 200 cfm of air combined with features and benefits that blow away the competition.

SPECIFICATIONS

Capacity (cfm)*	Air (psi)	Compressor Input	Compressor Oil Capacity	Mounted Weight (dry)
60	100 - 150	1030 rpm	2.5 gal.	328 lbs.
85	100 - 150	1460 rpm	2.5 gal.	328 lbs.
125	100 - 150	1330 rpm	3.5 gal.	407 lbs.
160	100 - 150	1675 rpm	3.5 gal.	407 lbs.
185	100 - 150	1920 rpm	3.5 gal.	407 lbs.
200*	100 - 150	2075 rpm	3.5 gal.	407 lbs.

*Consult factory for over 200 CFM.



VANAIR[®]
AIR POWER TO GO[™]

800.526.8817 | vanair.com



SPECIAL FEATURES

Safety Equipment

- High-temperature shutdown
- High-pressure shutdown
- Air pressure-relief safety valve
- Minimum pressure valve
- Automatic blowdown on shutdown
- Oil fill plug safety relief

Instrumentation

- Hour Meter
- Pressure Gauge
- Temperature Gauge

OPTIONS/ACCESSORIES

- External, spin-on air-oil separating element
- Dual Pressure
- Service/control line moisture separators
- Filter/lubricator/regulator (FLR)
- Air hoses, hose reels, and fittings
- OSHA safety valve (velocity fuse)
- Sullair® air tools
- Tool oiler/lubricator
- Post drivers

COMPRESSOR DIMENSIONS – (with fittings)

Models 60 and 85 cfm

Compressor (in.) – 11.9 W x 18 L x 13 H

Air/Fluid Receiver (in.) – 10 D x 30 L


Remote Fluid Cooler (in.) – 22 W x 17.5 H x 9.25 D

Models 125, 160, and 185 cfm

Compressor (in.) – 11.9 W x 18 L x 13 H

Air/Fluid Receiver (in.) – 12 D x 38 L

Remote Fluid Cooler (in.) – 26.5 W x 19.25 H x 9.25 D

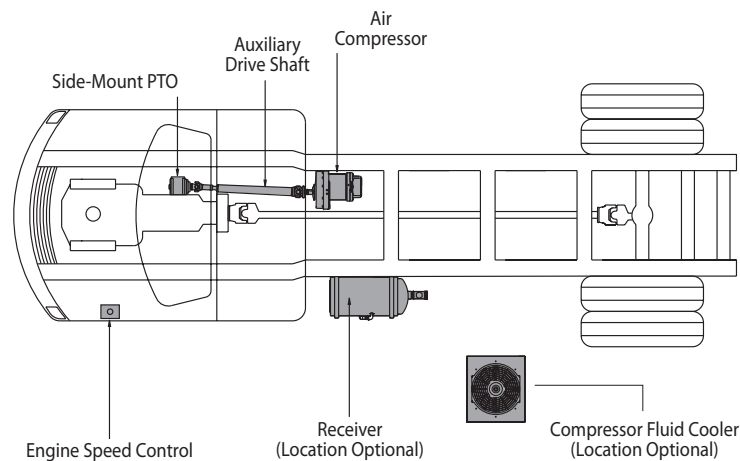

Product improvement is a continuing goal. Design and specifications are subject to change without notice or obligations.



VAN AIR[®]
AIR POWER TO GO[™]

Specifications subject to change without notice.
PTODRIVEN-0812